

The photograph may not match the reference exactly. Please read the product description to identify the finish.

TECHNICAL CHARACTERISTICS



Product Model:	T-151LED40-18	T-151LED60-18	T-151LED80-12
IP Protection degrees:	IP65		
IK Protection degrees:	IK08		
Light source:	18 x LUXEON 5050	18 x LUXEON 5050	12 x CREE XP-L
Total power consumption:	40W	60W	80W
Luminous Flux:	6000Lm	8600Lm	9000Lm
Luminous efficiency:	110-150Lm/w		
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available		
Voltage/Frequency:	100-240V/50-60Hz		
Warranty(Years):	5		
Units per box:	1		
Net Weight(Kg)	7.5	7.5	7.6


MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: Glass
Structure finish: Silver	Diffuser finish: Transparent

GEAR


Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

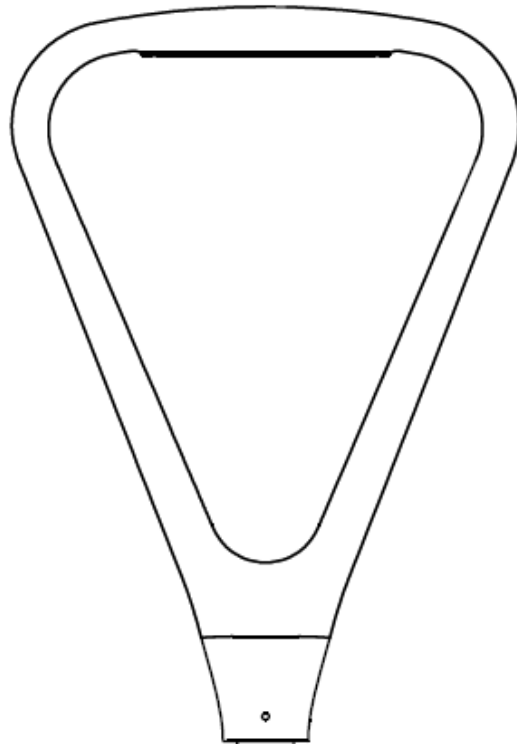

Ultra-white glass

High purity aluminum

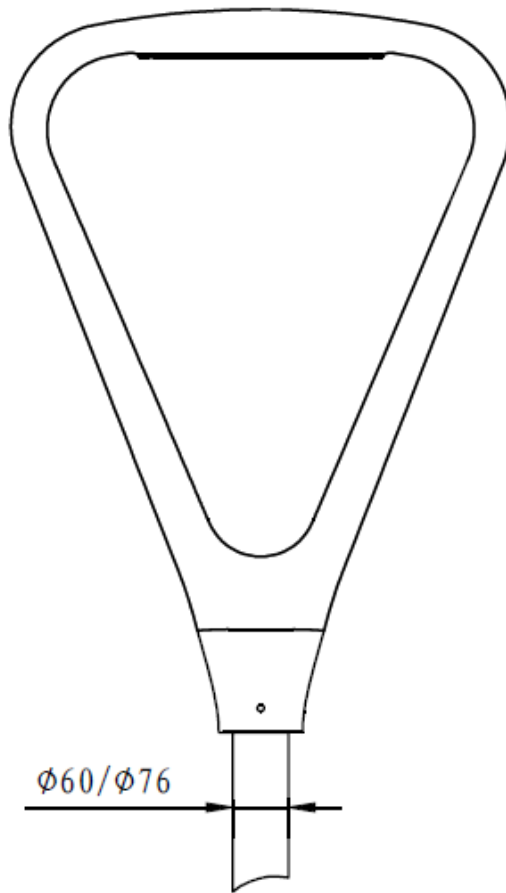

$\phi 60/\phi 76$

installation template