

KLED
T-70 Serious
/ 30W-100W /

Urban lighting

A Classic Residential Lighting
with Mediterranean style







T-70N
40-100W




T-70S
30-60W



T-70 Series

一组经典设计LED庭院灯具，灯具外形呈四方锥形设计，把古典建筑美感融入到现代设计理念中，体现着现代城市夜景的不朽传奇。

A classic design led garden lighting, which shape is square cone design, the classical architectural beauty into the modern design concept, reflecting the immortal legend of modern city night scene.

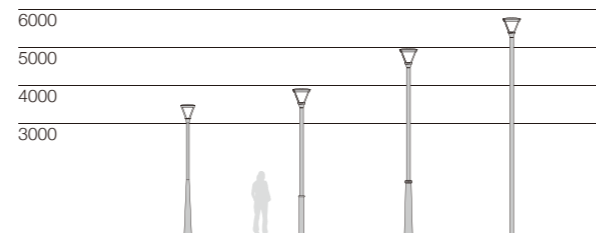


简述 Description



- 铝压铸灯体外壳，超白钢化玻璃，白色塑料反射罩
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 有2款尺寸可选择，安装管径有Ø60 / Ø76mm
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass, white PC plastic reflector.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- There are two sizes options, installation tube diameter Ø60/Ø76mm.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

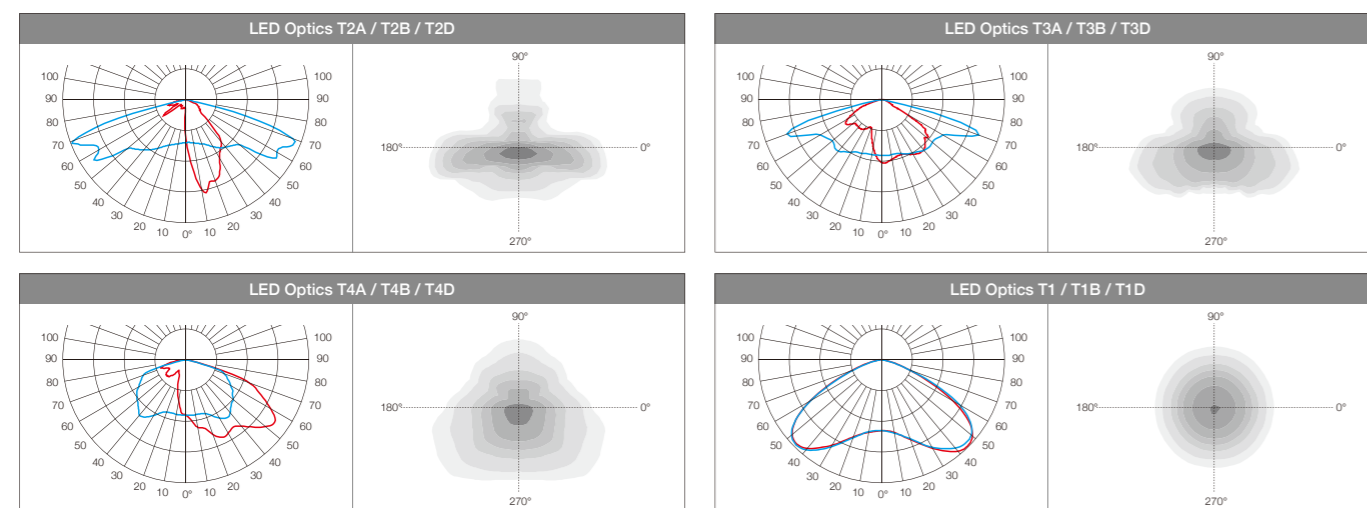


T-70N



灯具采用一体式灯体结构，整体PCB板结构设计，其最大功率100W

By Integrated lamp body structure, integrated PCB structure design, which maximum power of 100W.




T-70S



采用分体式灯体结构，Zhaga标准PCB设计，其最大功率60W

By Split lamp body structure, with zhaga standard PCB design, which maximum power 60W.



技术参数 Technology data

T-70N

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-70NLED40-32	40W	32	T1/T2A/T3A/T4A	480*480*550	13.5	176	384
T-70NLED60-32	60W	32	T1/T2A/T3A/T4A	480*480*550	13.5	176	384
T-70NLED75-48	75W	48	T1/T2A/T3A/T4A	480*480*550	13.7	176	384
T-70NLED100-48	100W	48	T1/T2A/T3A/T4A	480*480*550	13.7	176	384

LED chips - 3030

T-70NLED40-48	40W	48	T1/T2A/T3A/T4A	480*480*550	13.5	176	384
T-70NLED60-72	60W	72	T1D/T2D/T3D/T4D	480*480*550	13.5	176	384
T-70NLED75-72	75W	72	T1D/T2D/T3D/T4D	480*480*550	13.7	176	384
T-70NLED100-112	100W	112	T1B/T2B/T3B/T4B	480*480*550	13.7	176	384

T-70S

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-70SLED30-16 A4	30W	16	T1A/T2A/T3A/T4A	390*390*535	9.3	323	684
T-70SLED40-24 A2	40W	24	T1A/T2A/T3A/T4A	390*390*535	9.3	323	684
T-70SLED60-24 A2	60W	24	T1A/T2A/T3A/T4A	390*390*535	9.3	323	684

LED chips - 3030

T-70SLED30-56 B4	30W	56	T1D/T2D/T3D/T4D	390*390*535	9.3	323	684
T-70SLED40-56 B4	40W	56	T1B/T2B/T3B/T4B	390*390*535	9.3	323	684
T-70SLED60-84 B3	60W	84	T1B/T2B/T3B/T4B	390*390*535	9.3	323	684

可选配件 Accessories options

	Code
防水连接器 IP68 Connector	320000047
Ø76-60转换套 Adapter	210001154
Ø60-76转接头 Pole reducer	210001465

Adapter required for install on the pole.

延伸产品 More in family

SOLAR OPTIONS



TS-70N
Solar Lighting: 12W.



— King-Bridge Lighting —



宁波金羽桥照明科技有限公司

NING KING-BRIDGE LIGHTING TECHNOLOGY CO.,LTD.

地址：浙江省余姚市阳明街道新桥工业区

Add: Xinqiao Industry Zone, Yangming Street, Yuyao City, Zhejiang Province, China

Tel: +86-574-6256 6890

Fax: +86-574-6256 6827

info@kled.com

国内营销中心：金羽桥照明科技（上海）有限公司

地址：上海市长宁区中山西路179号4K室

电话：189 1897 7928