





T-219 Series

Exclusivity in UK, Spain, Italy and Middle East counties



T-219AL
240-360W



T-219HM
150-240W




T-219PM
150-240W



一组融入现代设计元素的创意LED庭院灯具，有三种安装方式，分别功率从150W-360W，可适用于广场、机场、停车场等场合，符合多种功能照明需求，多种光学系统可选配。

A group of creative led courtyard lamps with modern design elements, which can be installed in three ways, The power is 150W-360W respectively, which can be applied to squares, airports, parking lots and other occasions, Meet the requirements of multi-functional lighting, and a variety of optical systems can be options.

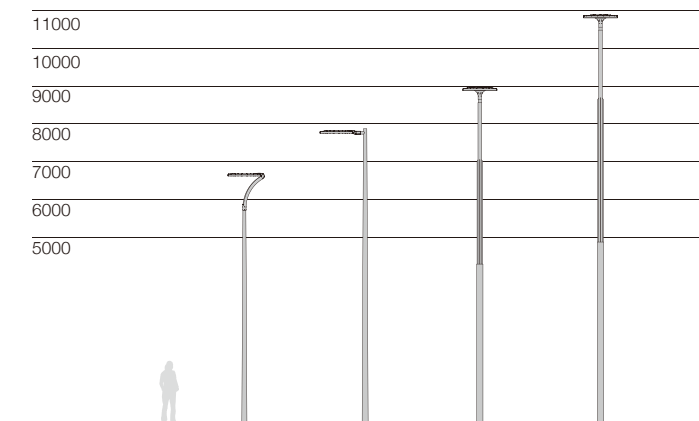

T-219 Series

Exclusivity in UK, Spain, Italy and Middle East counties




简述 Description






- 铝压铸灯体外壳，透明PC板
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 按钮式开启配置，维修更换方便
- 有3种安装方式，安装管径有 $\varnothing 60 / \varnothing 76\text{mm}$
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- Tool-free replaceable with push-button for opened device. The body can be detached and replaced easily.
- There are three installation modes, installation tube diameter $\varnothing 60/\varnothing 76\text{mm}$.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

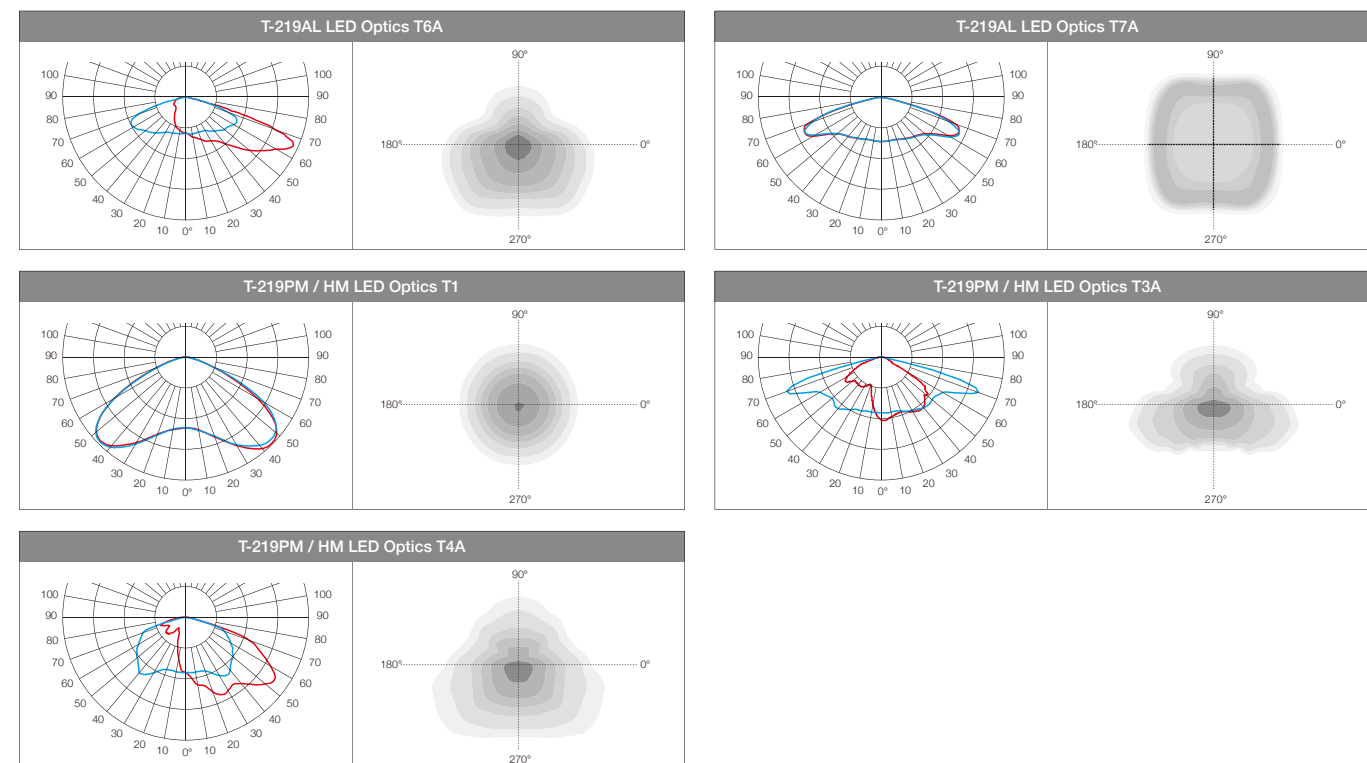

技术参数 Technology data



T-219AL

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 5050				Body:			
T-219ALLED240-96	240W	96	T6A/T7A	1010*1010*120	32	140	308
T-219ALLED330-96	330W	96	T6A/T7A	1010*1010*120	32.5	140	308
T-219ALLED360-96	360W	96	T6A/T7A	1010*1010*120	32.5	140	308
				Bracket: 640*640*285/4pcs			

T-219HM

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 5050				Body:			
T-219HMLED150-64	150W	64	T1/T3A/T4A	1010*1010*120	15	170	380
T-219HMLED200-64	200W	64	T1/T3A/T4A	1010*1010*120	15.5	170	380
T-219HMLED240-64	240W	64	T1/T3A/T4A	1010*1010*120	15.5	170	380

T-219PM

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 5050				Body:			
T-219PMLED150-64	150W	64	T1/T3A/T4A	1010*1010*120	26	154	318
T-219PMLED200-64	200W	64	T1/T3A/T4A	1010*1010*120	26.5	154	318
T-219PMLED240-64	240W	64	T1/T3A/T4A	1010*1010*120	26.5	154	318
				Bracket: 1310*235*155			

可选配件 Accessories options

	Code
	防水连接器 IP68 Connector 320000047
	$\varnothing 76$ -60转换套 Adapter 210001154 Adapter required for install on the pole.