




The photograph may not match the reference exactly.  
Please read the product description to identify the finish.



## TECHNICAL CHARACTERISTICS

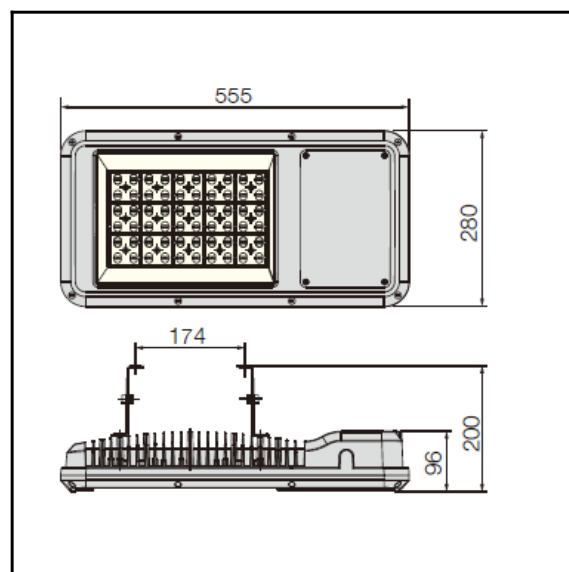

Type:	Flood Lighting					
IP Protection degrees:	IP66					
IK Protection degrees:	IK10					
Light source 1:	40xLED CREE60W WarmWhite-4000K 6200lm <sup>(N)</sup> CRI 70	48xLED CREE60W WarmWhite-4000K 6400lm <sup>(N)</sup> CRI 70	48xLED CREE80W WarmWhite-4000K 7600lm <sup>(N)</sup> CRI 70	48xLED CREE100W WarmWhite-4000K 9100lm <sup>(N)</sup> CRI 70	60xLED CREE120W WarmWhite-4000K 11300lm <sup>(N)</sup> CRI 70	60xLED CREE150W WarmWhite-4000K 13500lm <sup>(N)</sup> CRI 70
Total power consumption (W):	60.3	60.5	80.3	100.1	120.5	150.1
Voltage / Frequency:	100-240V/50-60Hz					
Warranty (Years):	5					
Units per box:	1					
Net Weight (Kg):	10.5/11.7	10.7/11.0	10.8/11.8	10.8/11.8	11.0/12.0	11.0/12.0

## MATERIALS / FINISHES

<b>Structure material:</b> High purity aluminium	<b>aiffuser material:</b> Glass
<b>Structure finish:</b> Silver	<b>Diffuser finish:</b> Transparent



## GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.  
Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890  
Email: [info@kled.com.cn](mailto:info@kled.com.cn)  
<http://www.kled.com.cn/>

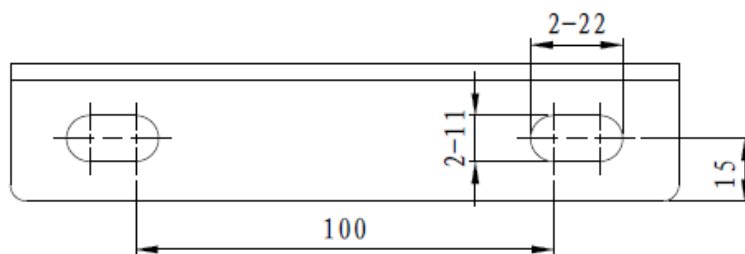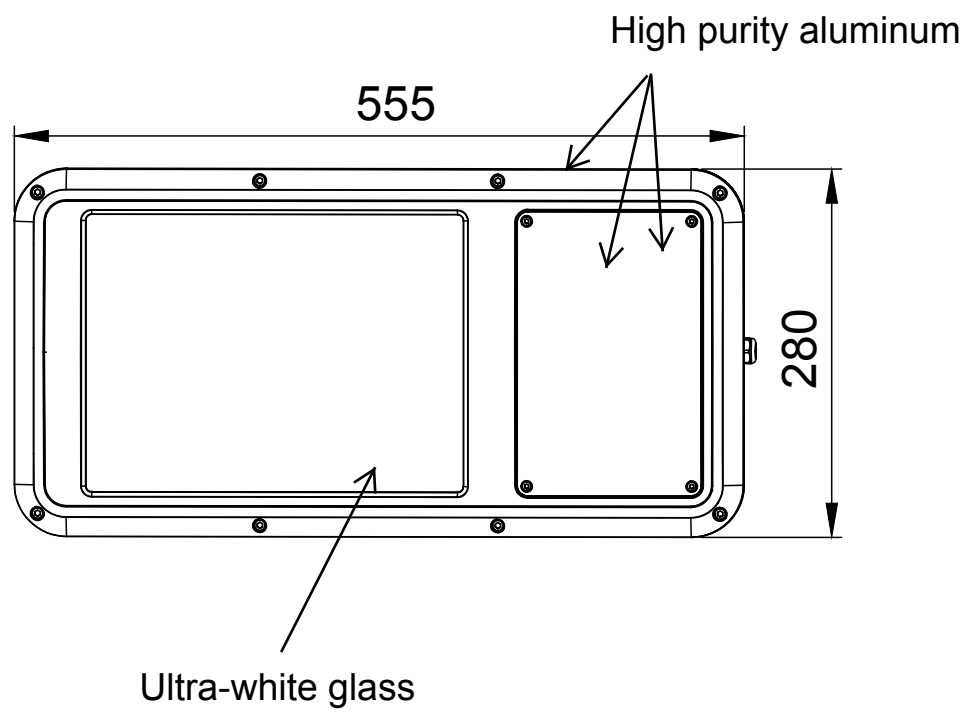

installation template

# OUTDOOR

