




The photograph may not match the reference exactly.
Please read the product description to identify the finish.



TECHNICAL CHARACTERISTICS

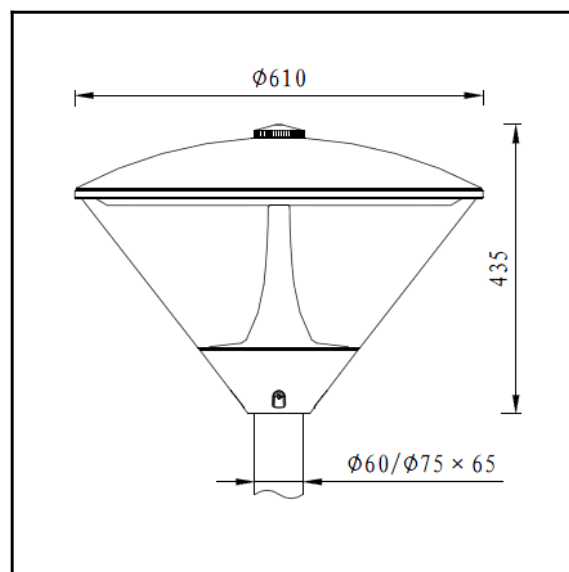

Product Model:	T-02BLED30-18	T-02BLED40-18	T-02BLED60-36	T-02BLED80-36
IP Protection degrees:	IP66	IP66	IP66	IP66
IK Protection degrees:	IK09	IK09	IK09	IK09
Light source:	18 x LED CREE / 18 x LED CREE / 18 x LUXEON 5050		36 x LED CREE / 36 x LED CREE / 36 x LUXEON 5050	
Total power consumption:	30W	40W	60W	80W
Luminous Flux:	2400-3300Lm	3200-4400Lm	4800-6600Lm	6400-8800Lm
Luminous efficiency:	80-110Lm/w			
Color temperature:	4000K as standard. Optimal 2700K, 3000K & 5700K. Amber LED available			
Voltage/Frequency:	100-240V/50-60Hz			
Warranty(Years):	5			
Units per box:	1			
Net Weight(Kg)	9.1	9.1	9.4	9.5

MATERIALS / FINISHES

Structure material:	High purity aluminium	diffuser material:	Transparent PC
Structure finish:	Black	Diffuser finish:	Matt

GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.
Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890
Email: info@kled.com.cn
<http://www.kled.com.cn/>


$\phi 610$

435

High purity aluminum



Transparent PC

$\phi 60 / \phi 75 \times 65$

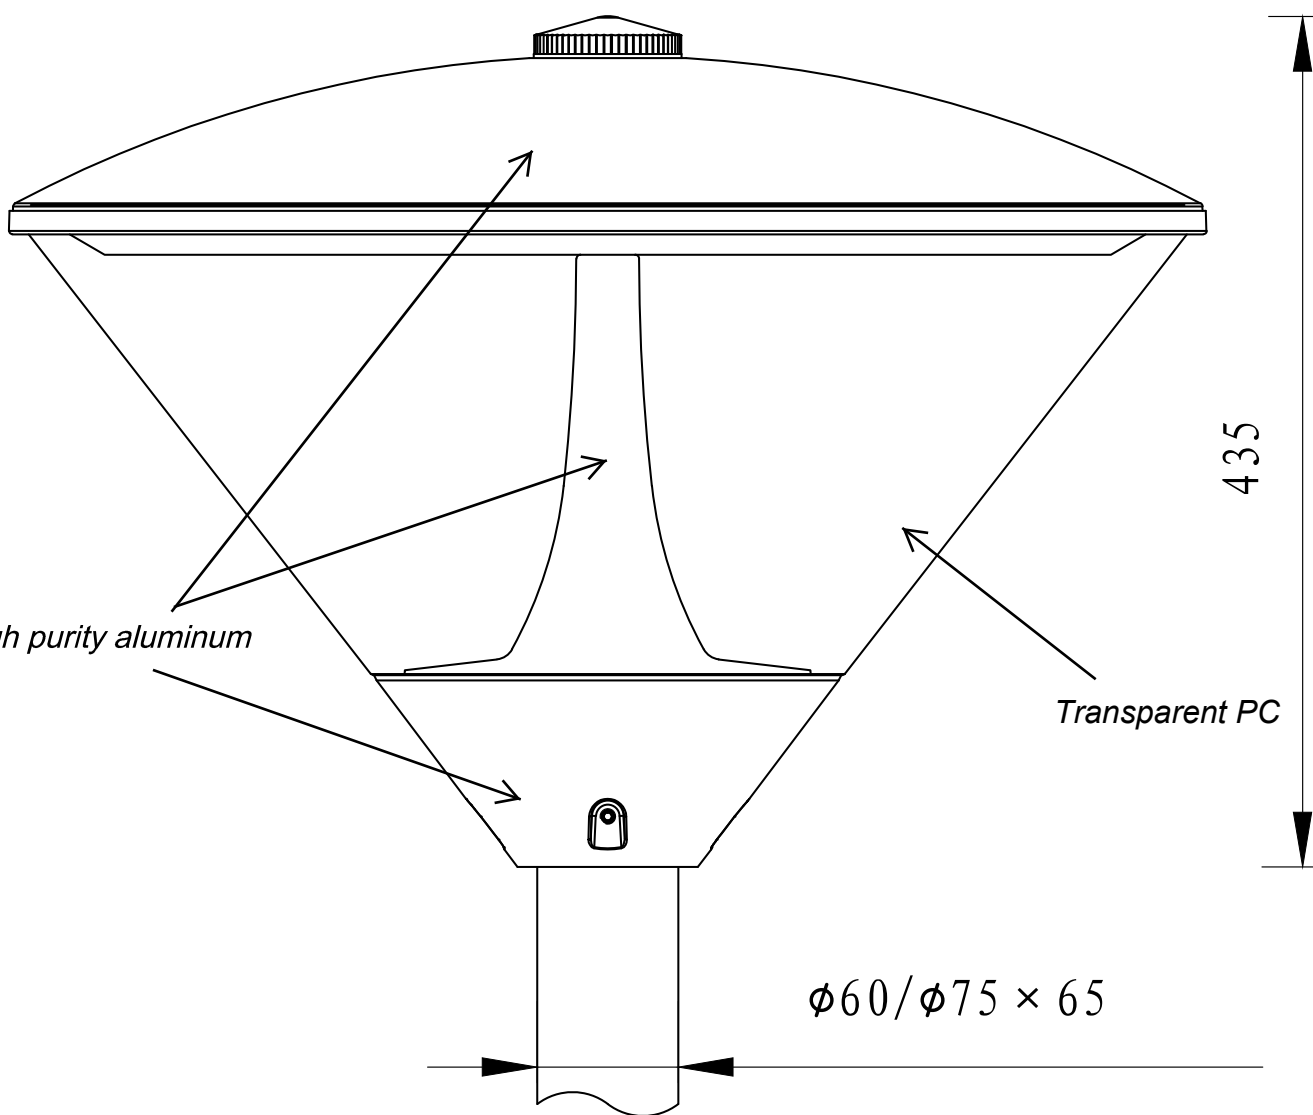


OUTDOOR


①

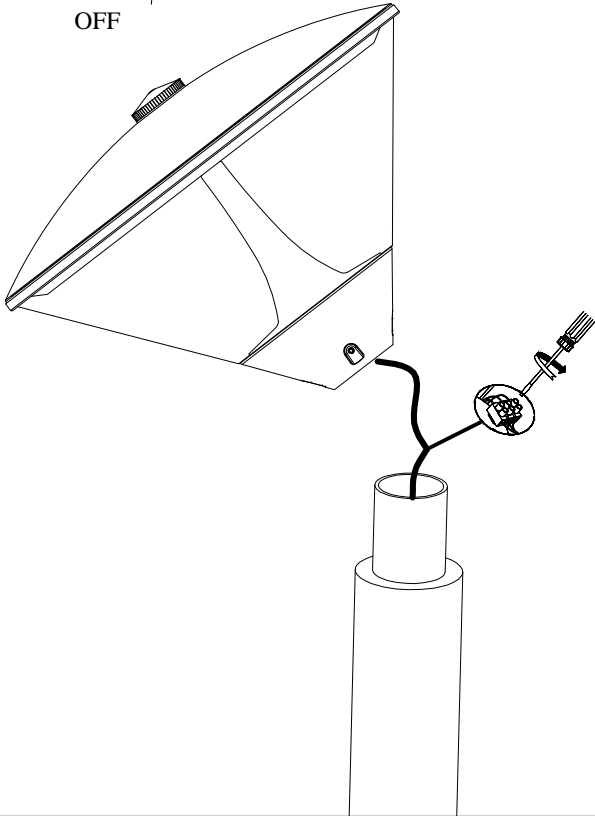

②

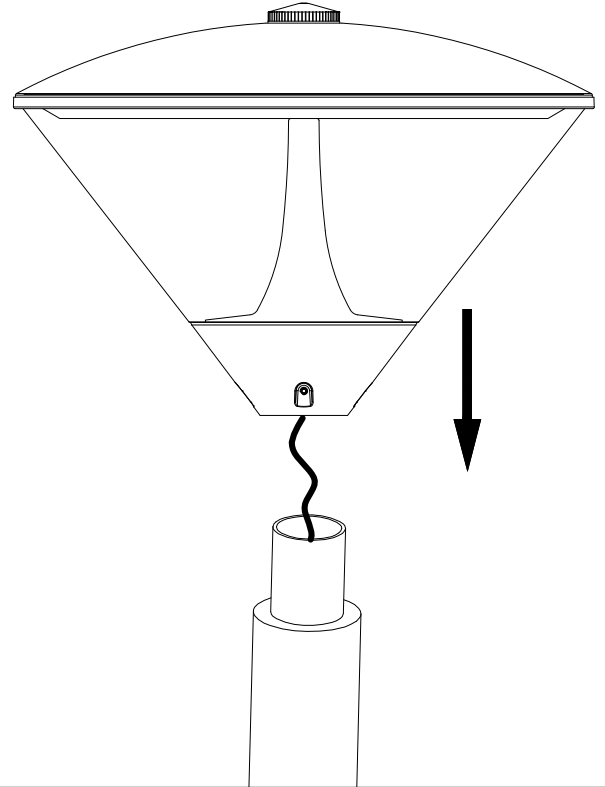

③

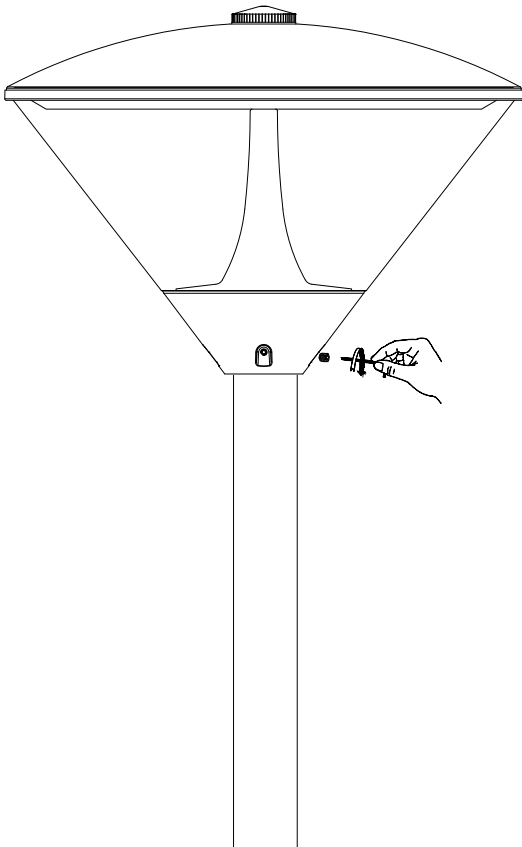

④

