




The photograph may not match the reference exactly.  
Please read the product description to identify the finish.



## TECHNICAL CHARACTERISTICS

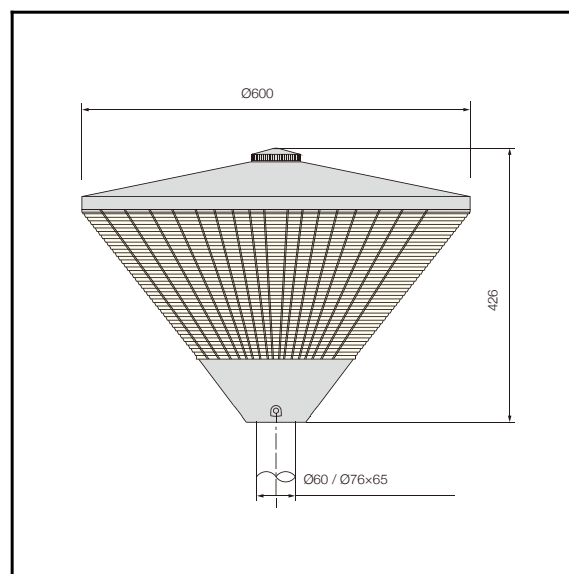

Product Model:	T-02LED40-24	T-02LED60-24	T-02LED60-32	T-02LED80-32
IP Protection degrees:	IP65	IP65	IP65	IP65
IK Protection degrees:	IK08	IK08	IK08	IK08
Light source:	24 x LED CREE / 24x SMD 5050	24 x LED CREE / 24x SMD 5050	32 x LED CREE / 32x SMD 5050	32 x LED CREE / 32x SMD 5050
Total power consumption:	40W	60W	60W	80W
Luminous Flux:	3800-4400Lm	5700-6600Lm	5700-6600Lm	7600-8800Lm
Luminous efficiency:	95-110Lm/w			
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available			
Voltage/Frequency:	100-240V/50-60Hz			
Warranty(Years):	5			
Units per box:	1			
Net Weight(Kg)	6.8	6.8	7	7

## MATERIALS / FINISHES

<b>Structure material:</b> High purity aluminium	<b>diffuser material:</b> PC diffuser
<b>Structure finish:</b> Black	<b>Diffuser finish:</b> Matt


## GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.



Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.  
Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890  
Email: [info@kled.com.cn](mailto:info@kled.com.cn)  
<http://www.kled.com.cn/>

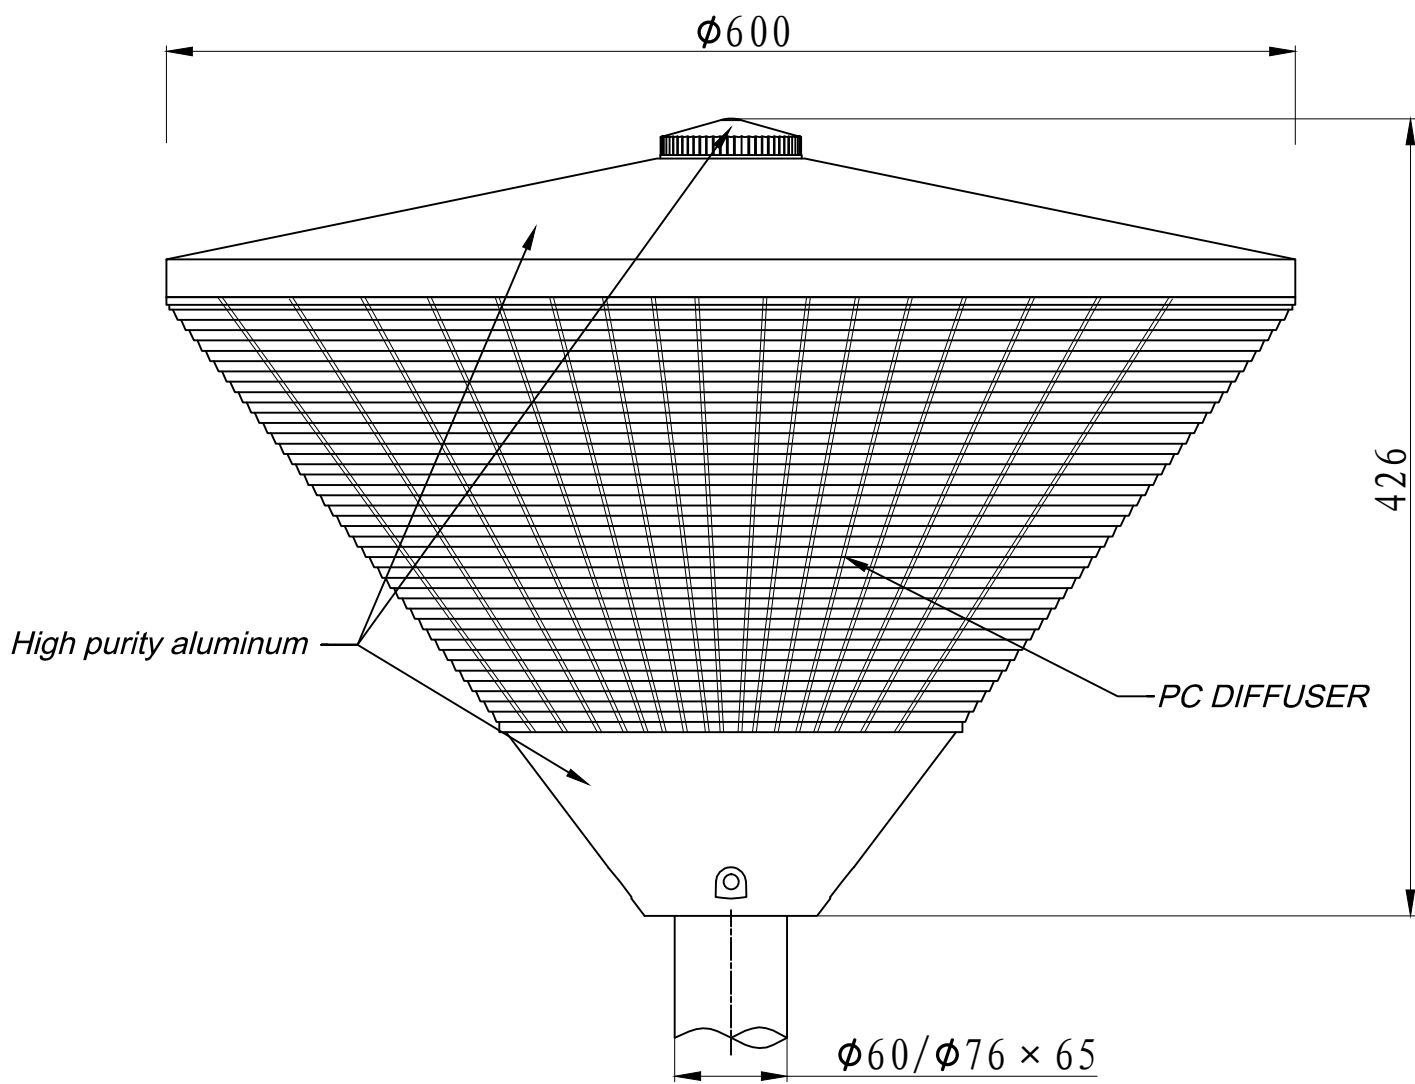


# OUTDOOR


①

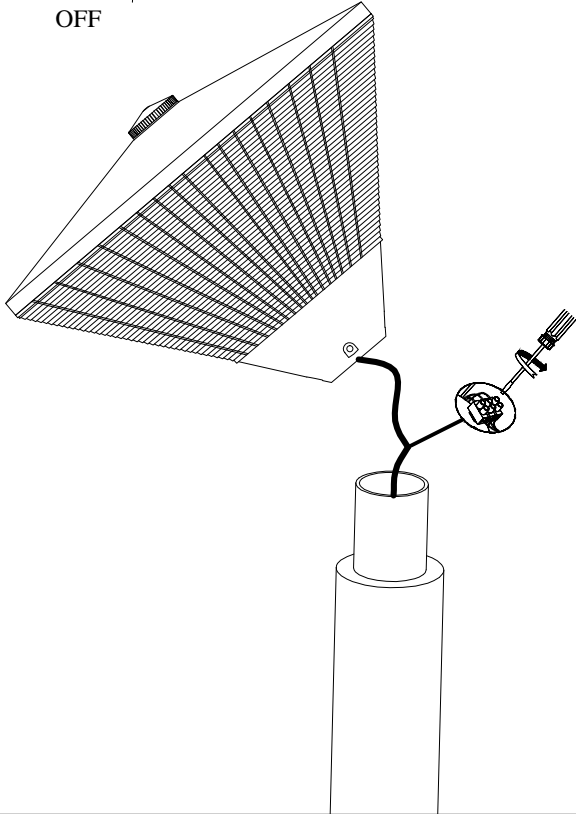

②

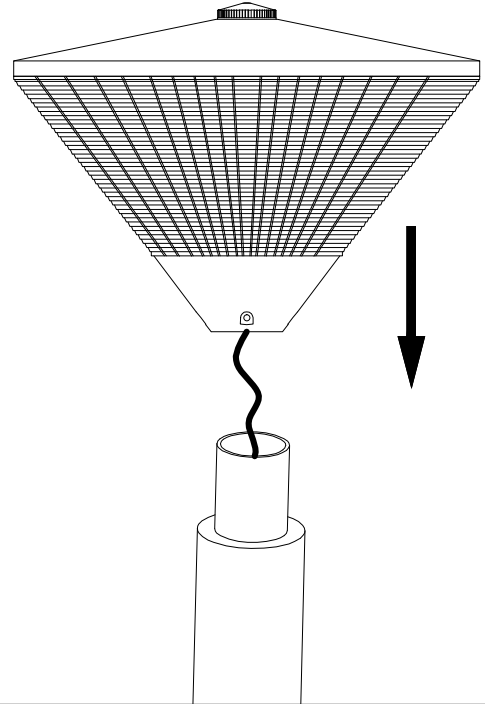

③

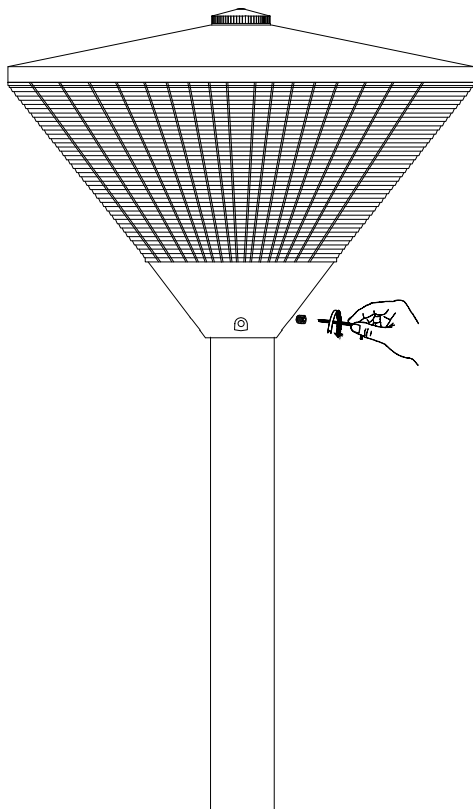

④

