




The photograph may not match the reference exactly.
Please read the product description to identify the finish.



TECHNICAL CHARACTERISTICS

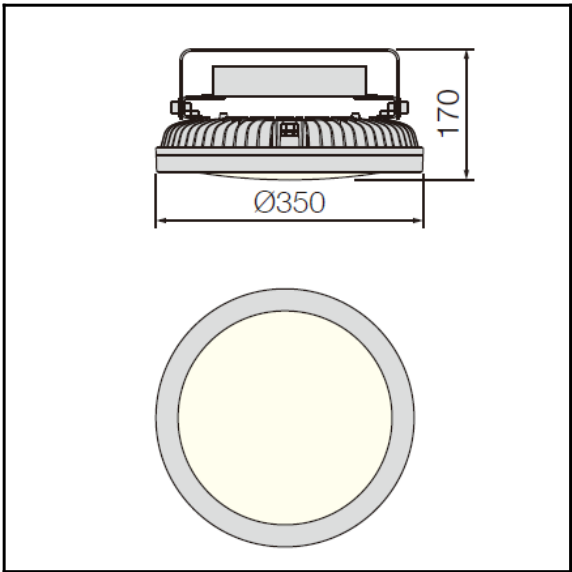

Type:	Highbay Lighting			
IP Protection degrees:	IP65			
IK Protection degrees:	IK10			
Light source 1:	198x LED SMD 60W Warm White - 4000K 3200lm ^(N) CRI 75	198x LED SMD 80W Warm White - 4000K 4000lm ^(N) CRI 75	198x LED SMD 60W Warm White - 4000K 3200lm ^(N) CRI 75	198x LED SMD 80W Warm White - 4000K 4000lm ^(N) CRI 75
Total power consumption (W):	60.3	80.1	60.3 (WITH SENSOR)	80.1 (WITH SENSOR)
Voltage / Frequency:	100-240V/50-60Hz			
Warranty (Years):	5			
Units per box:	1			
Net Weight (Kg):	5.3/6.0	5.3/6.0	5.5/6.2	5.5/6.2


MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: PC
Structure finish: Silver	Diffuser finish:Matt

GEAR


Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

High purity aluminum

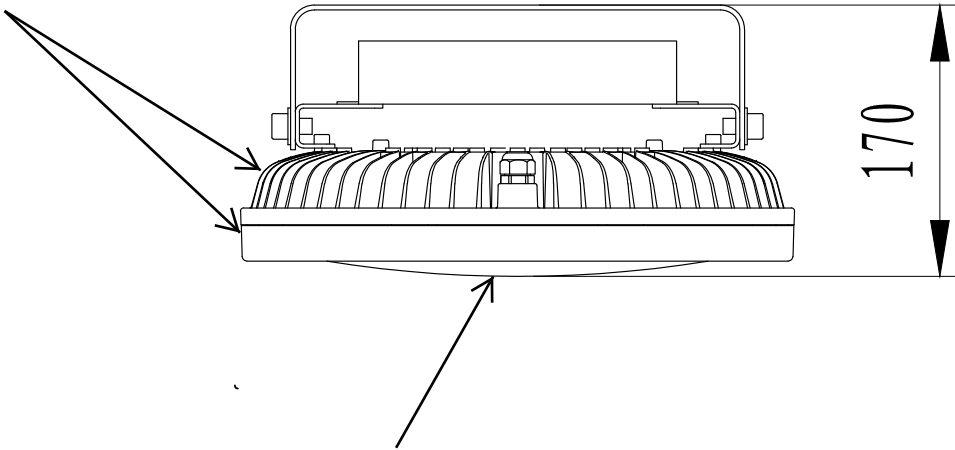

170

Frosting PC

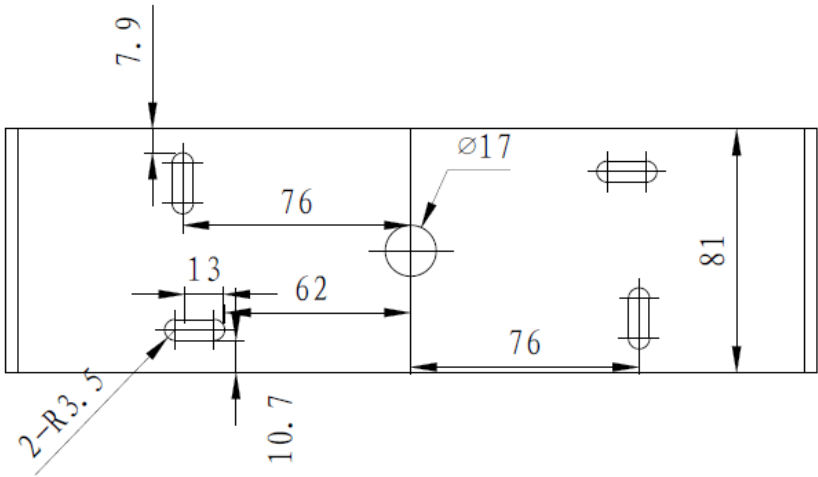

installation template