




T-75 Series



T-75MI
30-75W



T-75SI
30-40W

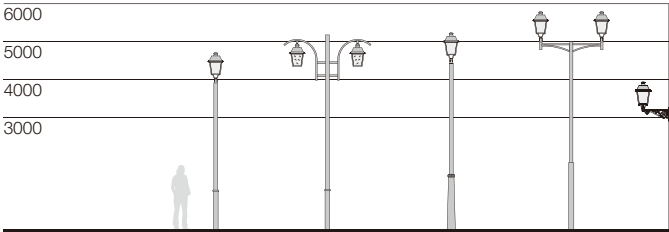



T-75 Series



T-75MS
30-75W



T-75SS
30-40W



T-75MW
30-75W



T-75SW
30-40W

T-75 Series

简述 Description




- 铝压铸灯体外壳，超白钢化玻璃，镀铬塑料反射罩，PMMA塑料扩散罩可选
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 古典式外形设计，配有多种安装支架及不同安装方式
- 灯具采用LED模组，安装更换方便
- 防紫外线聚氨酯塑粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系統可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质



MD-06A LED Module




- Die-casting aluminium body, super white tempered glass, Chrome plastic reflector, PMMA plastic diffuser optional.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- Classical shape design, with a variety of mounting brackets and different installation methods.
- LED module is used inside, which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

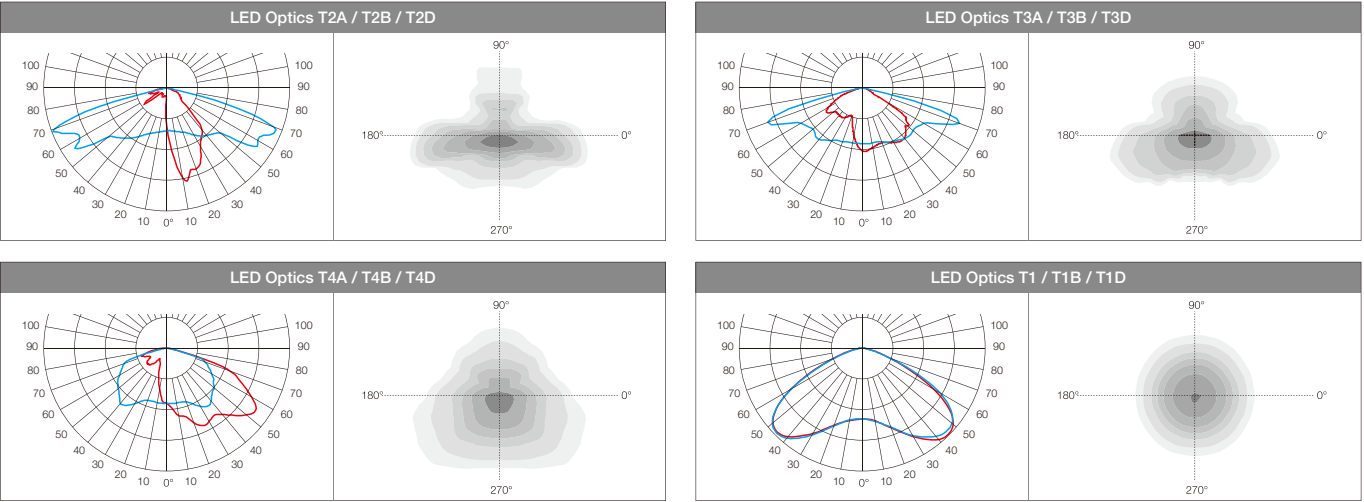

T-75MI Series

技术参数 Technology data



T-75MI

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-75MILED30-12	30W	12	T1/T2A/T3A/T4A	445*445*665	10.3	195	490
T-75MILED40-16	40W	16	T1/T2A/T3A/T4A	445*445*665	10.3	195	490
T-75MILED60-24	60W	24	T1/T2A/T3A/T4A	445*445*665	10.5	195	490
T-75MILED75-32	75W	32	T1/T2A/T3A/T4A	445*445*665	10.5	195	490

LED chips - 3030							
T-75MILED40-42	40W	42	T1B/T2B/T3B/T4B	445*445*665	10.3	195	490
T-75MILED60-84	60W	84	T1B/T2B/T3B/T4B	445*445*665	10.5	195	490

T-75MS

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-75MSLED30-12	30W	12	T1/T2A/T3A/T4A	445*445*665	10.3	195	490
T-75MSLED40-16	40W	16	T1/T2A/T3A/T4A	445*445*665	10.3	195	490
T-75MSLED60-24	60W	24	T1/T2A/T3A/T4A	445*445*665	10.5	195	490
T-75MSLED75-32	75W	32	T1/T2A/T3A/T4A	445*445*665	10.5	195	490

LED chips - 3030							
T-75MSLED40-42	40W	42	T1B/T2B/T3B/T4B	445*445*665	10.3	195	490
T-75MSLED60-84	60W	84	T1B/T2B/T3B/T4B	445*445*665	10.5	195	490

T-75MW

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-75MWLED30-12	30W	12	T1/T2A/T3A/T4A	445*445*665	14.0	150	415
T-75MWLED40-16	40W	16	T1/T2A/T3A/T4A	445*445*665	14.0	150	415
T-75MWLED60-24	60W	24	T1/T2A/T3A/T4A	445*445*665	14.0	150	415
T-75MWLED75-32	75W	32	T1/T2A/T3A/T4A	445*445*665	14.0	150	415




LED chips - 3030							
T-75MWLED40-42	40W	42	T1B/T2B/T3B/T4B	445*445*665	14.0	150	415
T-75MWLED60-84	60W	84	T1B/T2B/T3B/T4B	445*445*665	14.0	150	415

Bracket:
750*520*270/6pcs

T-75SI Series



技术参数 Technology data



T-75SI

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-75SILED30-16	30W	16	T2A/T3A/T4A/T4	315*315*470	5.6	504	1036
T-75SILED40-16	40W	16	T2A/T3A/T4A/T4	315*315*470	5.6	504	1036

LED chips - 3030							
T-75SILED30-56	30W	56	T1B/T2B/T3B/T4B	315*315*470	5.6	504	1036
T-75SILED40-56	40W	56	T1B/T2B/T3B/T4B	315*315*470	5.6	504	1036

T-75SS

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-75SSLED30-16	30W	16	T2A/T3A/T4A/T4	315*315*590	5.8	378	777
T-75SSLED40-16	40W	16	T2A/T3A/T4A/T4	315*315*590	5.8	378	777

LED chips - 3030							
T-75SSLED30-56	30W	56	T1B/T2B/T3B/T4B	315*315*590	5.8	378	777
T-75SSLED40-56	40W	56	T1B/T2B/T3B/T4B	315*315*590	5.8	378	777

T-75SW

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-75SWLED30-16	30W	16	2A/T3A/T4A/T4	445*445*535	7	260	520
T-75SWLED40-16	40W	16	2A/T3A/T4A/T4	445*445*535	7	260	520

LED chips - 3030							
T-75SWLED30-56	30W	56	T1B/T2B/T3B/T4B	445*445*535	7	260	520
T-75SWLED40-56	40W	56	T1B/T2B/T3B/T4B	445*445*535	7	260	520

可选配件 Accessories options

		Code
	防水连接器 IP68 Connector	320000047
	3/4"铜接头 Copper Screw	250000093 250000094
	透明罩 PC diffuser for T-75MN for T-75MI	220000323 210000308
	Ø60安装座 Fixing Arm	210000431
	安装花臂 Fixing Arm for T-75MN Adapter required for install on the pole.	250000466
	安装花臂 Fixing Arm for T-75MI Adapter required for install on the pole.	250000648